



RAC | MULTI SPLIT | CAC

**A new dimension of**  
**QUALITY**

**AUX**  
AIR CONDITIONER

## **AUX - About the brand** Intelligent & Healthy Living

The AUX Group, operating on the market since 1986, is one of the leading producers of smart home appliances, including mainly air conditioners. The group has 10 modern manufacturing bases - largest in Ningbo, Nanchang and Tianjin, China - and 5 research and development centers. AUX devices are available in over 180 countries around the world. Thanks continuous R&D investment, the AUX brand can offer competitive, technologically advanced and stylistically attractive products that meet the highest quality standards and European energy efficiency requirements.





## Residential air conditioners RAC - stylish, comfortable, energy-saving solutions for houses and flats.

Wall-mounted AUX units combine modern technological solutions, functionality and high-quality design. All AUX devices operate on the basis of the latest, environmentally friendly R32 refrigerant and inverter technology, thanks to which they achieve high energy efficiency parameters. They have the energy efficiency class A ++ in cooling mode and A + in heating mode. The standard equipment of indoor units includes an advanced air ionizer that will take care of the health and safety of users and a Wi-Fi 2.0 control module plugged into the air conditioner via a USB plug - an effective and easy to install solution that allows you to control the operation of the unit using mobile devices.




## Modern, sophisticated design.

The range of AUX room air conditioners includes solutions for every interior. From the universal styling of the Freedom series, through the ultra-modern, sophisticated design of the J-Smart series to the luxurious, elegant form of the Halo series models. The design of the J-Smart series has been awarded the prestigious **IF Design Award 2019**.




## Built-in Wi-Fi module - convenient and simple control from anywhere in the world.

All AUX wall-mounted models are equipped with a Wi-Fi module as standard equipment. The Halo, Halo Deluxe, J-Smart and J-Smart ART series remain equipped with a Wi-Fi 2.0 module plugged into the air conditioner with a USB plug. It is an easy-to-install solution that allows you to control the device's operating parameters using mobile devices, even while you are outside the home or the office where the air conditioner is installed.

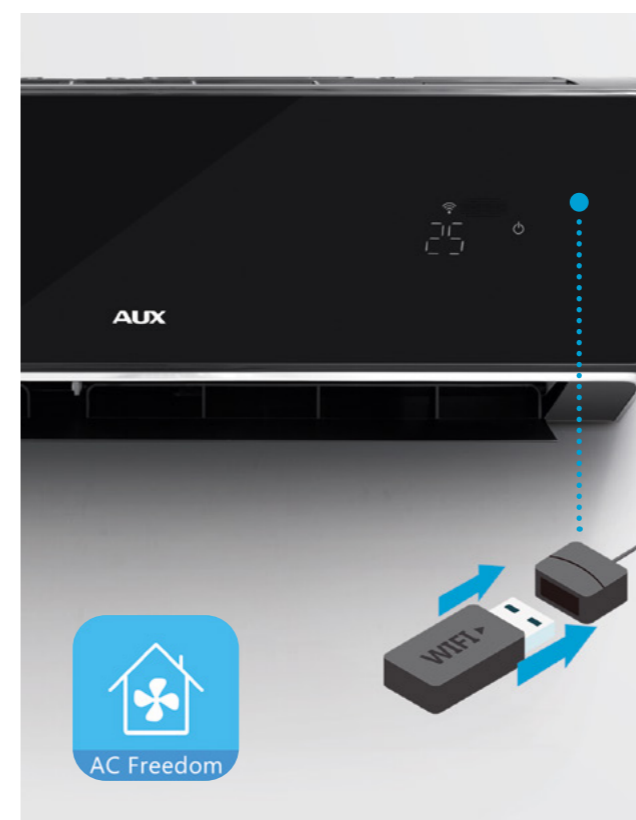

### AC Freedom application.

To control the air conditioner via Wi-Fi, it is necessary to install the AC Freedom application on the mobile device. The application allows you to control multiple devices and save individual parameters for each of them, such as operating mode, temperature settings and fan speed level. The user-friendly and easy-to-use interface of the application ensures maximum convenience of device control. The app is available for download from the Google Play Store (for Android) and Appstore (for iOS).



Cooling capacity [Btu/h]	Freedom FH Series	J-Smart J20 Series	J-Smart ART JP Series	Halo HA Series	Halo Deluxe HE Series
09 kBTu/h	AUX-09FH	AUX-09J20	AUX-09JP	AUX-09HA	AUX-09HE
12 kBTu/h	AUX-12FH	AUX-12J20	AUX-12JP	AUX-12HA	AUX-12HE
18 kBTu/h	AUX-18FH	AUX-18J20	AUX-18JP	AUX-18HA	AUX-18HE
24 kBTu/h	AUX-24FH	AUX-24J20	AUX-24JP	AUX-24HA	AUX-24HE

Cooling capacity [Btu/h]	Q-Smart QC Series	Q-Smart Premium QP Series	Q-Smart Premium Grey QB Series
09 kBTu/h	AUX-09QC	AUX-09QP	AUX-09QB
12 kBTu/h	AUX-12QC	AUX-12QP	AUX-12QB
18 kBTu/h	AUX-18QC	AUX-18QP	AUX-18QB
24 kBTu/h	AUX-24QC	AUX-24QP	AUX-24QB



## Advanced filtration system - clean and safe air in your home.

Wall-mounted AUX units have a built-in multi-stage filtration system that ensures clean and safe air in an air-conditioned room. Larger contaminants such as dust and dust particles are effectively captured by the primary air filter. Depending on the model, it is a honeycomb filter (Freedom series) or a high-density filter mesh filter (J-Smart and Halo series). The standard equipment of all wall-mounted units includes a Cold Plasma ionizer and an antibacterial filter, and the J-Smart and Halo series models additionally have a built-in PM2.5 filter. Standard equipment of air conditioners can be supplemented with a number of optional filters providing advanced protection against a specific type of contamination.



**UV Sterilization**



**Honeycomb filter\***



**Antibacterial filter**



**Multi-stage air filtration system**




**Built in air ionizer**




**Increased density filter**




**PM2.5 filter**






**Movable air louvers**

Movable vertical and horizontal air louvers of the AUX indoor units allow for precise adjustment of the air flow direction and ensure even distribution of cooled air throughout the room.




**Built-in Wi-Fi module**

All AUX wall-mounted models are equipped with a Wi-Fi module as standard, enabling convenient and simple control of the air conditioner operation using mobile devices from anywhere in the world.




**UV sterilization**

The highest models of the Q-Smart series are equipped with UV lamps that guarantee clean and healthy air. UV sterilization effectively cleans the air by eliminating viruses, fungi and microbes. This function is especially recommended for allergy sufferers and people susceptible to infections.




**Multi-stage air filtration system**

The multi-stage filtration system ensures clean and safe air in an air-conditioned room. Coarse dirt, such as dust and dust particles, are captured by the primary air filter (honeycomb or high-density filter \*\*). The standard equipment of the units also includes, depending on the model, an antibacterial filter and a PM2.5 \*\*\* filter.




**Built in air ionizer**

All AUX wall mounted units are equipped with the Cold Plasma ionizer as standard, which effectively eliminates fine dust particles, viruses, bacteria, mites, mold, pollen and other allergens, and even cigarette smoke from the air. It also reduces unpleasant odors.



**Advanced self-cleaning**

Thanks to the self-cleaning function, the inside of the air conditioner is kept clean by eliminating moisture and inhibiting the growth of bacteria, mold and unpleasant odors on the heat exchanger. This guarantees the user a clean and safe environment.



**Intelligent self-diagnosis**

All AUX devices monitor malfunctions on an ongoing basis and switch off in the event of a failure. An error code appears on the display of the indoor unit indicating the type of failure, which greatly simplifies service operations.

---

**\*\*** Freedom series models have a basic honeycomb air filter. Models from the J-Smart, J-Smart ART, Halo, Halo Deluxe, Q-Smart Premium, Q-Smart Premium Grey series are equipped with an increased density filter.  
**\*\*\*** Freedom and Q-Smart series models have an antibacterial filter as standard. The models in the J-Smart, J-Smart ART, Halo, Halo Deluxe, Q-Smart Premium, Q-Smart Premium Grey series have an antibacterial filter and PM2.5 as standard.













**Anti-corrosion coated casings**

The casing for the outdoor unit has been covered with a number of protective layers, protecting it against insects, rodents, moisture, dust and fire. This ensures a long service life of the device and an aesthetic appearance, even after many years of exposure to unfavorable environmental conditions.











**High-quality inverter compressor**

The inverter rotary compressor used in AUX air conditioners guarantees reliable and efficient operation of devices and the highest energy efficiency parameters. It also ensures low operating costs and low generated noise level. Durable, high-quality materials used in the design of the compressor ensure its long and trouble-free operation.

	Cooling mode	Heating mode	Fan mode	Auto mode	Dry mode	Heat 8°C function	Auto restart	Turbo mode	Built-in Wi-Fi module	Wireless remote controller	LED display	Timer	Self-cleaning function	Self-diagnosis function	Gold-plated fins of the heat exchanger	UV sterilization	Honeycomb filter	Increased density filter	PM2.5 filter	Antibacterial filter	Air ionizer	Sleep mode	Vertical airflow	Horizontal airflow
<b>Freedom</b> FH Series AUX-(09/12/18/24)FH 	•	•	•	•	•		•	•	•	•	•	•	•	•			•			•	•	•	•	•
<b>J-Smart</b> J20 Series AUX-(09/12/18/24)J20 	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
<b>J-Smart ART</b> JP Series AUX-(09/12/18/24)JP 	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
<b>Halo</b> HA Series AUX-(09/12/18/24)HA 	•	•	•	•	•		•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
<b>Halo Deluxe</b> HE Series AUX-(09/12/18/24)HE 	•	•	•	•	•		•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
<b>Q-Smart</b> QC Series AUX-(09/12/18/24)QC 	•	•	•	•	•		•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•
<b>Q-Smart Premium</b> QP Series AUX-(09/12/18/24)QP 	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
<b>Q-Smart Premium Grey</b> QB Series AUX-(09/12/18/24)QB 	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•

2022

Specifications, appearance and functions are subject to change without prior division.

	4D air supply	„I Feel“ mode	ECO mode	„Anti-Cold-Air“ function	Intelligent defrosting	„Anti-Fungus“ function	Drip tray heater (outdoor unit)	Two-way draining	Standby 0.3W	Anti-corrosion coated casings (outdoor units)
	•	•		•	•	•		•	•	
	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•		•	•	•
	•	•	•	•	•	•		•	•	•
	•	•		•	•	•		•	•	•
	•	•	•	•	•	•		•	•	•
	•	•	•	•	•	•		•	•	•



# Freedom

## FH Series

AUX-09/12/18/24FH



Model		AUX-09FH	AUX-12FH	AUX-18FH	AUX-24FH
<b>Cooling &amp; Heating capacity</b>	[kW]	2,60 / 2,80	3,50 / 3,50	5,00 / 5,50	6,50 / 6,50
<b>SEER/SCOP</b>	[W/W]	6,5 / 4,37	6,65 / 4,36	6,57 / 4,02	6,89 / 4,11
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09FH/I</b>	<b>AUX-12FH/I</b>	<b>AUX-18FH/I</b>	<b>AUX-24FH/I</b>
<b>Sound pressure level</b>	[dB(A)]	32/29/26/22/20	34/30/28/23/20	40/32/29/26/22	38/35/32/30/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	750 x 285 x 200	750 x 285 x 200	900 x 310 x 225	1082 x 330 x 233
<b>Indoor unit weight</b>	[kg]	7,5	8,0	12,0	15,0
<b>Outdoor unit</b>		<b>AUX-09FH/O</b>	<b>AUX-12FH/O</b>	<b>AUX-18FH/O</b>	<b>AUX-24FH/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	43	43
<b>Outdoor unit dimensions W/H/D</b>	[mm]	730 x 545 x 285	730 x 545 x 285	800 x 545 x 315	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	25,0	25,0	35,0	45,0
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32.  
Specifications, appearance and functions are subject to change without prior notice.



- R32 refrigerant
- DC inverter
- Built-in Wi-Fi module
- Auto restart
- TURBO mode
- Fast cooling / heating
- Timer
- Self-cleaning
- Sleep mode
- Intelligent defrosting
- Honeycomb filter
- Antibacterial filter
- Air ionizer
- LED display
- I FEEL function
- Anti-Cold-Air function
- Anti-Fungus function
- Two-way draining
- Paddles made of hydrophilic aluminum
- Vertical airflow
- Horizontal airflow
- 4D air supply
- Self-diagnosis function
- Standby 0.3 W
- Anti-corrosion coated casings (outdoor units)
- Strong dehumidification
- Super EMC
- Wireless remote controller
- COOLING
- HEATING
- VENTILATION
- DRY MODE
- AUTO
- Optional air filters



# Q-Smart

## QC Series

AUX-09/12/18/24QC




Model		AUX-09QC	AUX-12QC	AUX-18QC	AUX-24QC
<b>Cooling &amp; Heating capacity</b>	[kW]	2,7 / 3,0	3,5 / 3,8	5,4 / 5,6	6,7 / 7,2
<b>SEER/SCOP</b>	[W/W]	6,1 / 4,00	6,1 / 4,00	7,3 / 4,3	6,1 / 4,00
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09QC/I</b>	<b>AUX-12QC/I</b>	<b>AUX-18QC/I</b>	<b>AUX-24QC/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	761 x 295 x 200	761 x 295 x 200	960 x 316 x 312	1090 x 328 x 227
<b>Indoor unit weight</b>	[kg]	7,5	7,5	11,0	12,5
<b>Outdoor unit</b>		<b>AUX-09QC/O</b>	<b>AUX-12QC/O</b>	<b>AUX-18QC/O</b>	<b>AUX-24QC/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	705 x 530 x 279	705 x 530 x 279	785 x 530 x 300	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	22,5	22,5	28	39
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32.  
Specifications, appearance and functions are subject to change without prior notice.



- R32 refrigerant
- DC inverter
- Built-in Wi-Fi module
- Auto restart
- TURBO mode
- Fast cooling / heating
- Timer
- Self-cleaning
- Sleep mode
- Intelligent defrosting
- Increased density filter
- Antibacterial filter
- Air ionizer
- LED display
- I FEEL function
- Anti-Cold-Air function
- Anti-Fungus function
- Two-way draining
- Paddles made of hydrophilic aluminum
- Vertical airflow
- Horizontal airflow
- 4D air supply
- Self-diagnosis function
- Standby 0.3 W
- Anti-corrosion coated casings (outdoor units)
- Strong dehumidification
- Super EMC
- Wireless remote controller
- COOLING
- HEATING
- VENTILATION
- DRY MODE
- AUTO
- Optional air filters

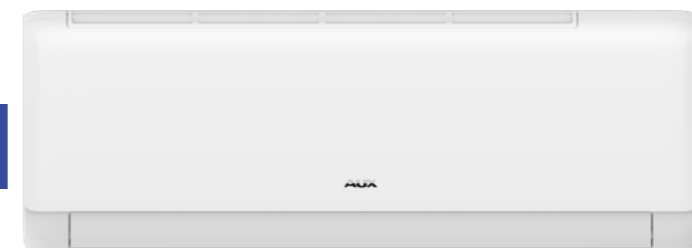

# Halo

## HA Series

AUX-09/12/18/24HA



Model		AUX-09HA	AUX-12HA	AUX-18HA	AUX-24HA
<b>Cooling &amp; Heating capacity</b>	[kW]	2,75 / 3,10	3,60 / 3,80	5,50 / 5,90	7,30 / 7,30
<b>SEER/SCOP</b>	[W/W]	6,16 / 4,17	6,12 / 4,14	6,57 / 4,02	6,89 / 4,11
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09HA/I</b>	<b>AUX-12HA/I</b>	<b>AUX-18HA/I</b>	<b>AUX-24HA/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	788 x 292 x 198	788 x 292 x 198	940 x 316 x 224	1121 x 329 x 231
<b>Indoor unit weight</b>	[kg]	8,0	8,5	12,0	14,0
<b>Outdoor unit</b>		<b>AUX-09HA/O</b>	<b>AUX-12HA/O</b>	<b>AUX-18HA/O</b>	<b>AUX-24HA/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	730 x 545 x 285	730 x 545 x 285	800 x 545 x 315	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	25,0	25,0	35,0	45,0
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

Air ionizer

LED display

Gold-plated fins of the heat exchanger (Outdoor unit)

Gold-plated fins of the heat exchanger (Indoor unit)

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

COOLING


HEATING

FAN MODE

DRY MODE

AUTO

Optional air filters

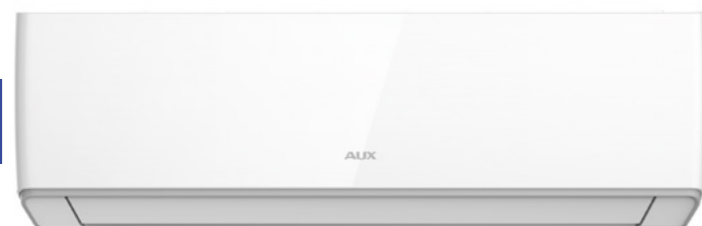

# Halo Deluxe

## HE Series

AUX-09/12/18/24HE



Model		AUX-09HE	AUX-12HE	AUX-18HE	AUX-24HE
<b>Cooling &amp; Heating capacity</b>	[kW]	2,75 / 3,10	3,60 / 3,80	5,50 / 5,90	7,30 / 7,30
<b>SEER/SCOP</b>	[W/W]	6,16 / 4,17	6,12 / 4,14	6,57 / 4,02	6,89 / 4,11
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09HE/I</b>	<b>AUX-12HE/I</b>	<b>AUX-18HE/I</b>	<b>AUX-24HE/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	788 x 292 x 198	788 x 292 x 198	940 x 316 x 224	1121 x 329 x 231
<b>Indoor unit weight</b>	[kg]	8,0	8,5	12,0	14,0
<b>Outdoor unit</b>		<b>AUX-09HE/O</b>	<b>AUX-12HE/O</b>	<b>AUX-18HE/O</b>	<b>AUX-24HE/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	730 x 545 x 285	730 x 545 x 285	800 x 545 x 315	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	25,0	25,0	35,0	45,0
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

Air ionizer

LED display

Gold-plated fins of the heat exchanger (Outdoor unit)

Gold-plated fins of the heat exchanger (Indoor unit)

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

COOLING

HEATING

FAN MODE

DRY MODE

AUTO

Optional air filters



# J-Smart

## J20 Series

AUX-09/12/18/24J20



Model		AUX-09J20	AUX-12J20	AUX-18J20	AUX-24J20
<b>Cooling &amp; Heating capacity</b>	[kW]	2,70 / 3,00	3,60 / 3,70	5,40 / 5,80	7,20 / 7,20
<b>SEER/SCOP</b>	[W/W]	6,16 / 4,17	6,12 / 4,14	6,57 / 4,02	6,89 / 4,11
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09J20/I</b>	<b>AUX-12J20/I</b>	<b>AUX-18J20/I</b>	<b>AUX-24J20/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	792 x 292 x 201	792 x 292 x 201	940 x 316 x 224	1132 x 330 x 232
<b>Indoor unit weight</b>	[kg]	8,0	8,5	12,0	15,0
<b>Outdoor unit</b>		<b>AUX-09J20/O</b>	<b>AUX-12J20/O</b>	<b>AUX-18J20/O</b>	<b>AUX-24J20/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	730 x 545 x 285	730 x 545 x 285	800 x 545 x 315	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	25,0	25,0	35,0	45,0
<b>Application area</b>	[°C]	-10 / -20	-10 / -20	-10 / -20	-10 / -20

Air conditioning equipment contains fluorinated greenhouse gases R32.  
Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

Air ionizer

LED display

Gold-plated fins of the heat exchanger

Gold-plated fins of the heat exchanger

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Easy and fast installation

Drip tray heater (outdoor unit)

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

COOLING

HEATING

VENTILATION

DRY MODE

AUTO

Optional air filters



# J-Smart ART

## JP Series

AUX-09/12/18/24JP



Model		AUX-09JP	AUX-12JP	AUX-18JP	AUX-24JP
<b>Cooling &amp; Heating capacity</b>	[kW]	2,70 / 3,00	3,60 / 3,70	5,40 / 5,80	7,20 / 7,20
<b>SEER/SCOP</b>	[W/W]	6,16 / 4,17	6,12 / 4,14	6,57 / 4,02	6,89 / 4,11
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09JP/I</b>	<b>AUX-12JP/I</b>	<b>AUX-18JP/I</b>	<b>AUX-24JP/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	792 x 292 x 201	792 x 292 x 201	940 x 316 x 224	1132 x 330 x 232
<b>Indoor unit weight</b>	[kg]	8,0	8,5	12,0	15,0
<b>Outdoor unit</b>		<b>AUX-09JP/O</b>	<b>AUX-12JP/O</b>	<b>AUX-18JP/O</b>	<b>AUX-24JP/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	730 x 545 x 285	730 x 545 x 285	800 x 545 x 315	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	25,0	25,0	35,0	45,0
<b>Application area</b>	[°C]	-10 / -20	-10 / -20	-10 / -20	-10 / -20

Air conditioning equipment contains fluorinated greenhouse gases R32.  
Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

Air ionizer

LED display

Gold-plated fins of the heat exchanger

Gold-plated fins of the heat exchanger

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Easy and fast installation

Drip tray heater (outdoor unit)

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

COOLING

HEATING

VENTILATION

DRY MODE

AUTO

Optional air filters





# Q-Smart Premium

QP Series

AUX-09/12/18/24QP



Model		AUX-09QP	AUX-12QP	AUX-18QP	AUX-24QP
<b>Cooling &amp; Heating capacity</b>	[kW]	2,7 / 3,0	3,5 / 3,8	5,4 / 5,6	6,7 / 7,2
<b>SEER/SCOP</b>	[W/W]	6,1 / 4,00	6,1 / 4,00	7,3 / 4,3	6,1 / 4,00
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09QP/I</b>	<b>AUX-12QP/I</b>	<b>AUX-18QP/I</b>	<b>AUX-24QP/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	761 x 295 x 200	761 x 295 x 200	960 x 316 x 312	1090 x 328 x 227
<b>Indoor unit weight</b>	[kg]	7,5	7,5	11,0	12,5
<b>Outdoor unit</b>		<b>AUX-09QP/O</b>	<b>AUX-12QP/O</b>	<b>AUX-18QP/O</b>	<b>AUX-24QP/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	705 x 530 x 279	705 x 530 x 279	785 x 530 x 300	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	22,5	22,5	28	39
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

UV sterilization

LED display

Gold-plated fins of the heat exchanger

Gold-plated fins of the heat exchanger

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Easy and fast installation

Heating mode 8°C

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

Cooling mode


Heating mode

Fan mode

Dry mode

AUTO

Optional air filters

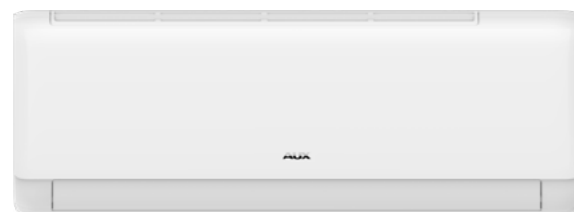

# Q-Smart Premium Grey

QB Series

AUX-09/12/18/24QB



Model		AUX-09QB	AUX-12QB	AUX-18QB	AUX-24QB
<b>Cooling &amp; Heating capacity</b>	[kW]	2,7 / 3,0	3,5 / 3,8	5,4 / 5,6	6,7 / 7,2
<b>SEER/SCOP</b>	[W/W]	6,1 / 4,00	6,1 / 4,00	7,3 / 4,3	6,1 / 4,00
<b>Energy Efficiency Class</b>	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-09QB/I</b>	<b>AUX-12QB/I</b>	<b>AUX-18QB/I</b>	<b>AUX-24QB/I</b>
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	761 x 295 x 200	761 x 295 x 200	960 x 316 x 312	1090 x 328 x 227
<b>Indoor unit weight</b>	[kg]	7,5	7,5	11,0	12,5
<b>Outdoor unit</b>		<b>AUX-09QB/O</b>	<b>AUX-12QB/O</b>	<b>AUX-18QB/O</b>	<b>AUX-24QB/O</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	40	42	44	45
<b>Outdoor unit dimensions W/H/D</b>	[mm]	705 x 530 x 279	705 x 530 x 279	785 x 530 x 300	900 x 700 x 350
<b>Outdoor unit weight</b>	[kg]	22,5	22,5	28	39
<b>Application area</b>	[°C]	-10 / -15	-10 / -15	-10 / -15	-10 / -15

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.



R32 refrigerant

DC inverter

Built-in Wi-Fi module

Auto restart

TURBO mode

Timer

Self-cleaning

Self-diagnosis function

Sleep mode

Intelligent defrosting

Increased density filter

PM2.5 filter

Antibacterial filter

UV sterilization

LED display

Gold-plated fins of the heat exchanger

Gold-plated fins of the heat exchanger

Super EMC

Paddles made of hydrophilic aluminum

Two-way draining

I FEEL function

Anti-Cold-Air function

Anti-Fungus function

Standby 0,3W

ECO mode

Vertical airflow

Horizontal airflow

4D air supply

Easy and fast installation

Heating mode 8°C

Anti-corrosion coated casings (outdoor units)

Wireless remote controller

Cooling mode

Heating mode

Fan mode

Dry mode

AUTO

Optional air filters



## Portable air conditioner - effective and comfortable cooling without the need for specialist assembly.

Portable AUX air conditioners will prove themselves wherever it is not possible to install traditional split air conditioning. They do not require specialized installation - warm air is discharged from the room through an exhaust pipe that can be mounted in a window or in a wall. They are distinguished by mobility - the device can be easily moved to another room at any time, thanks to the wheels attached to the base of the casing.



## Portable air conditioner MI Series

<b>Model</b>	<b>AUX-12MI</b>	
<b>Cooling capacity</b>	[kW]	3,40
<b>Power</b>	[V~,Hz,Ph]	220-240, 50, 1
<b>Energy Efficiency Class (cooling)</b>	-	A
<b>Sound pressure level</b>	[dB(A)]	64,0 / 63,5 / 63,0
<b>Dimensions W/H/D</b>	[mm]	476 x 710 x 385
<b>Weight (netto / brutto)</b>	[kg]	33,0 / 38,0
<b>Temperature setting range</b>	[°C]	16 ~ 32
<b>Refrigerant type</b>	-	R290

Specifications, appearance and functions are subject to change without prior notice.



## Multi split systems


- flexible air conditioning solutions for many rooms.

The multi split AUX system allows the installation of 2 to 5 indoor units to one unit. The offer includes 6 models of outdoor units with a cooling capacity from 4.1 to 12.0 kW. The devices operate using ecological R32 refrigerant and modern inverter technology, guaranteeing reliability and energy efficiency. They offer stable operation over a wide range of outdoor temperatures, ranging from -15 ° C to 52 ° C for cooling mode and -20 ° C to 24 ° C for heating mode. The system allows the use of cooling installations with a total length of up to 80 meters, depending on the power of the aggregate, and elevations up to 15 meters.

# Multi system

- saving installation space and high flexibility.

The multi split AUX system allows you to connect 2 to 5 indoor units to one unit. This allows for a reduction in the number of needed outdoor units in comparison with single systems, and thus a significant space saving on building facades, roofs and balconies. In addition, the devices do not have to be installed at the same time - the system can be expanded with new indoor units over time, maintaining the appropriate performance parameters of individual elements of the air conditioning system.

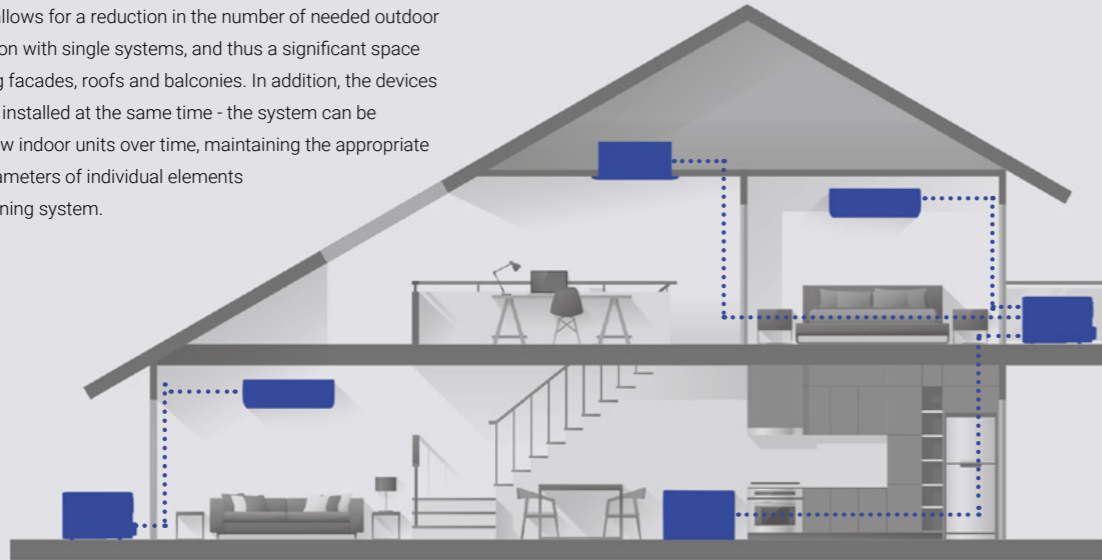

	Multi Split Outdoor Unit 2 ports	Multi Split Outdoor Unit 3 ports	Multi Split Outdoor Unit 4 ports	Multi Split Outdoor Unit 5 ports	Console M series
<b>Cooling capacity</b> [Btu/h]					
14 kBtu/h	AUX-M2-14LCLH	-	-	-	AUX-M-K09/I
18 kBtu/h	AUX-M-18 LCLH	-	-	-	-
21 kBtu/h	-	AUX-M3-21LCLH	-	-	-
27 kBtu/h	-	AUX-M3-27LCLH	-	-	-
36 kBtu/h	-	-	AUX-M4-36LCLH	-	-
42 kBtu/h	-	-	-	AUX-M5-42LCLH	-
8871 kBtu/h	-	-	-	-	AUX-M-K12/I
11942 kBtu/h	-	-	-	-	AUX-M-K16/I
13989 kBtu/h	-	-	-	-	-

	Wall Mounted units Freedom FH series	Wall Mounted units J-Smart JO series	Wall Mounted units J-Smart ART JB series	Cassette units C series	Duct units D series	Floor / Ceiling units F series
<b>Cooling capacity</b> [Btu/h]						
07 kBtu/h	AUX-07FH/I	AUX-07JO/I	AUX-07JB/I	-	AUX-M-D07/I	-
09 kBtu/h	AUX-09FH/I	AUX-09JO/I	AUX-09JB/I	AUX-M-C09/I	AUX-M-D09/I	AUX-M-F09/I
12 kBtu/h	AUX-12FH/I	AUX-12JO/I	AUX-12JB/I	AUX-M-C12/I	AUX-M-D12/I	AUX-M-F12/I
18 kBtu/h	AUX-18FH/I	AUX-18JO/I	AUX-18JB/I	AUX-M-C18/I	AUX-M-D18/I	AUX-M-F18/I
24 kBtu/h	AUX-24FH/I	AUX-24JO/I	AUX-24JB/I	-	-	-

## Wall-mounted units

### Freedom

AUX-(07/09/12/18/24)FH/I



Model		AUX-07FH/I	AUX-09FH/I	AUX-12FH/I	AUX-18FH/I	AUX-24FH/I
<b>Cooling capacity</b>	[kW]	2,05	2,58	3,50	5,00	6,50
<b>Heating capacity</b>	[kW]	2,15	2,70	3,50	5,37	6,50
<b>Sound pressure level</b>	[dB(A)]	32/29/26/22/20	32/29/26/22/20	34/30/28/23/20	40/32/29/26/22	38/35/32/30/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	750 x 285 x 200	750 x 285 x 200	750 x 285 x 200	900 x 310 x 225	1082 x 330 x 233
<b>Indoor unit weight</b>	[kg]	7,5	7,5	8,0	12,0	15,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

- R32 refrigerant
- DC inverter
- Built-in Wi-Fi module
- Auto restart
- TURBO mode
- Timer
- Self-cleaning
- Self-diagnosis function
- Sleep mode
- Intelligent defrosting
- Super EMC
- Honeycomb filter
- Air ionizer
- LED display
- I FEEL function
- Anti-Cold-Air function
- Anti-Fungus function
- Two-way draining
- Paddles made of hydrophilic aluminum
- Vertical airflow
- Wireless remote controller
- COOLING
- HEATING
- Fan mode
- DRY MODE
- Auto mode
- Optional air filters

## Wall-mounted units

### J-Smart

AUX-(07/09/12/18/24)JO/I



Model		AUX-07JO/I	AUX-09JO/I	AUX-12JO/I	AUX-18JO/I	AUX-24JO/I
<b>Cooling capacity</b>	[kW]	2,05	2,58	3,50	5,27	7,03
<b>Heating capacity</b>	[kW]	2,15	2,70	3,50	5,37	7,05
<b>Sound pressure level</b>	[dB(A)]	38/31/27/22/19	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
<b>Indoor unit dimensions W/H/D</b>	[mm]	792 x 292 x 201	792 x 292 x 201	792 x 292 x 201	940 x 316 x 224	1132 x 330 x 232
<b>Indoor unit weight</b>	[kg]	8,0	8,0	8,5	12,0	14,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

- R32 refrigerant
- DC inverter
- Built-in Wi-Fi module
- Auto restart
- TURBO mode
- Timer
- Self-cleaning
- Self-diagnosis function
- Sleep mode
- Intelligent defrosting
- Super EMC
- LED display
- Increased density filter
- PM2.5 filter
- Antibacterial filter
- Air ionizer
- Gold-plated fins of the heat exchanger
- Gold-plated fins of the heat exchanger
- Paddles made of hydrophilic aluminum
- Two-way draining
- I FEEL function
- Anti-Cold-Air function
- Anti-Fungus function
- Standby 0,3W
- Vertical airflow
- Wireless remote controller
- Easy and fast installation
- COOLING
- HEATING
- FAN MODE
- DRY MODE
- Auto mode
- Optional air filters

## Wall-mounted units


### J-Smart ART

AUX-(07/09/12/18/24)JB/I



Model		AUX-07JB/I	AUX-09JB/I	AUX-12JB/I	AUX-18JB/I	AUX-24JB/I
Cooling capacity	[kW]	2,05	2,58	3,50	5,27	7,03
Heating capacity	[kW]	2,15	2,70	3,50	5,37	7,05
Sound pressure level	[dB(A)]	38/31/27/22/19	38/31/27/22/19	38/32/29/23/20	41/32/31/26/23	38/36/33/31/23
Indoor unit dimensions W/H/D	[mm]	792 x 292 x 201	792 x 292 x 201	792 x 292 x 201	940 x 316 x 224	1132 x 330 x 232
Indoor unit weight	[kg]	8,0	8,0	8,5	12,0	14,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

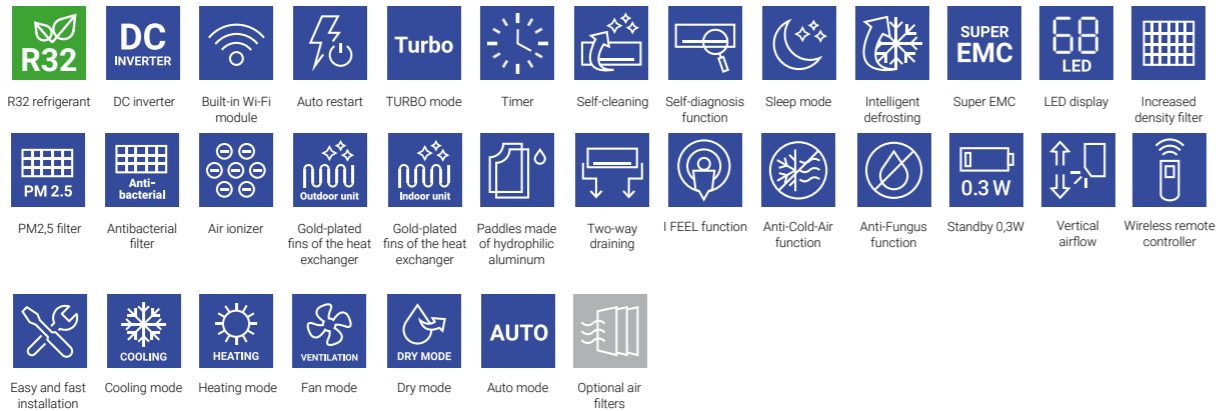


## Floor / Ceiling units

AUX-M-F(09/12/18)/I



Model		AUX-M-F09/I	AUX-M-F12/I	AUX-M-F18/I
Cooling capacity	[kW]	2,80 (1,50 - 3,55)	3,60 (1,70 - 3,70)	5,3 (2,50 - 5,60)
Heating capacity	[kW]	3,00 (1,60 - 3,81)	3,90 (2,03 - 4,42)	5,80 (3,03 - 7,03)
Sound pressure level	[dB(A)]	39/36/30	39/36/30	45/42/40
Indoor unit dimensions W/H/D	[mm]	929 x 660 x 205	929 x 660 x 205	929 x 660 x 205
Indoor unit weight	[kg]	26,0	26,0	26,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

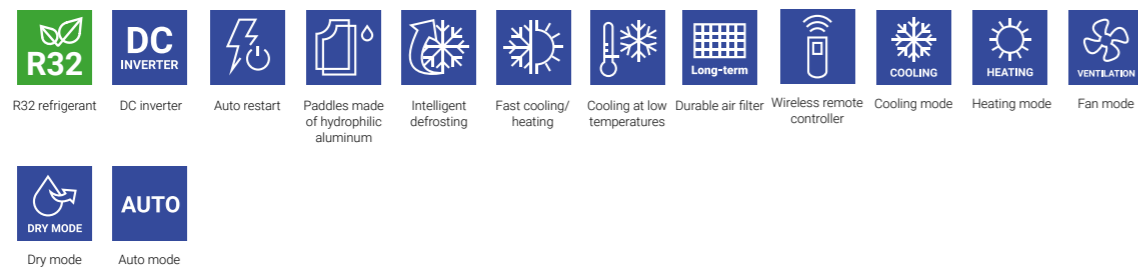


## Cassette units

AUX-M-C(09/12/18)/I




Indoor unit model		AUX-M-C09	AUX-M-C12	AUX-M-C18
Decorative panel model	-	AUX-P-01	AUX-P-01	AUX-P-01
Cooling capacity	[kW]	2,80 (1,50 - 3,55)	3,60 (1,70 - 3,70)	5,0 (2,50 - 5,6)
Heating capacity	[kW]	3,00 (1,60 - 3,81)	3,9 (2,03 - 4,42)	5,6 (3,03 - 7,03)
Sound pressure level	[dB(A)]	45/41/35	45/41/35	45/41/35
Indoor unit dimensions W/H/D	[mm]	570 x 570 x 260	570 x 570 x 260	570 x 570 x 260
Panel dimensions	[mm]	650 x 650 x 55	650 x 650 x 55	650 x 650 x 55
Indoor unit weight	[kg]	18,0	18,0	18,0
Panel weight	[kg]	2,2	2,2	2,2

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

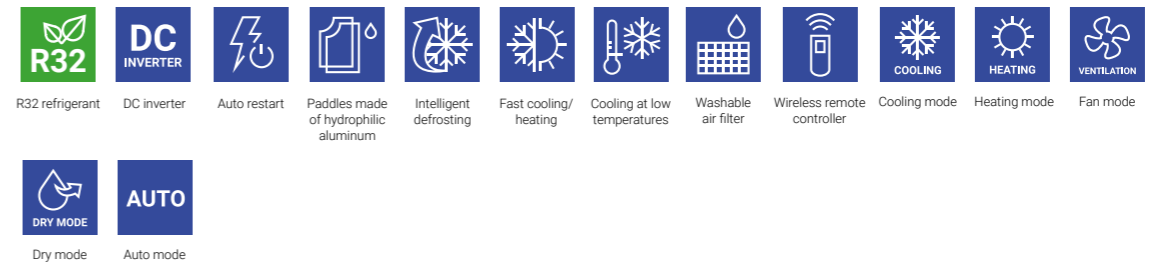


## Duct units

AUX-M-D(07/09/12/18)/I



Indoor unit model		AUX-M-D07/I	AUX-M-D09/I	AUX-M-D12/I	AUX-M-D18/I
Cooling capacity	[kW]	2,20 (1,13 - 2,70)	2,60 (1,50 - 3,55)	3,60 (1,71 - 3,85)	5,10 (2,50 - 5,80)
Heating capacity	[kW]	2,50 (1,34 - 3,17)	2,90 (1,70 - 3,65)	4,00 (1,90 - 3,92)	5,80 (2,84 - 6,40)
ESP	[Pa]	10,0	10,0	10,0	10,0
Sound pressure level	[dB(A)]	35/31/28	35/31/28	38/34/31	42/38/36
Indoor unit dimensions W/H/D	[mm]	700 x 470 x 200	700 x 470 x 200	700 x 470 x 200	1000 x 470 x 200
Indoor unit weight	[kg]	18,5	18,5	18,5	24,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

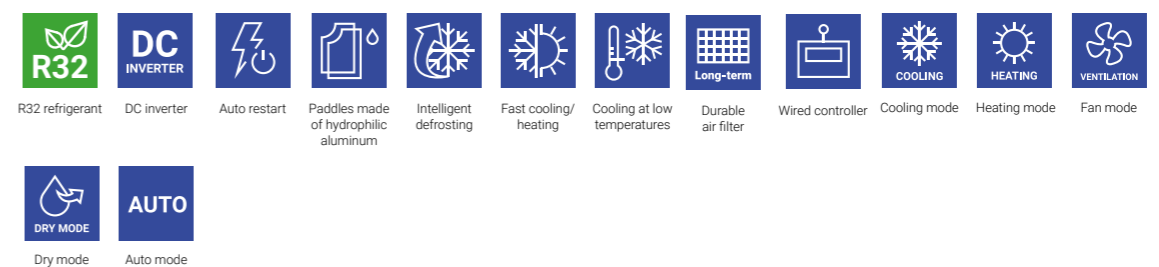




## Console

AUX-M-K(09/12/16)/I

Indoor unit model		AUX-M-K09/I	AUX-M-K12/I	AUX-M-K16/I
Cooling capacity	[kW]	2.60 (1.30-3.35)	3.50 (1.60-3.60)	4.10 (2.00-4.60)
Heating capacity	[kW]	2.80 (1.40-3.61)	3.80 (1.93-4.32)	4.50 (2.63-5.73)
Air flow	[m <sup>3</sup> /h]	600,0	600,0	650,0
Sound pressure level	[dB(A)]	45/39/33	45/39/33	47/41/35
Indoor unit dimensions W/H/D	[mm]	720 x 610 x 230	720 x 610 x 230	720 x 610 x 230
Indoor unit weight	[kg]	15,0	15,0	15,0

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.

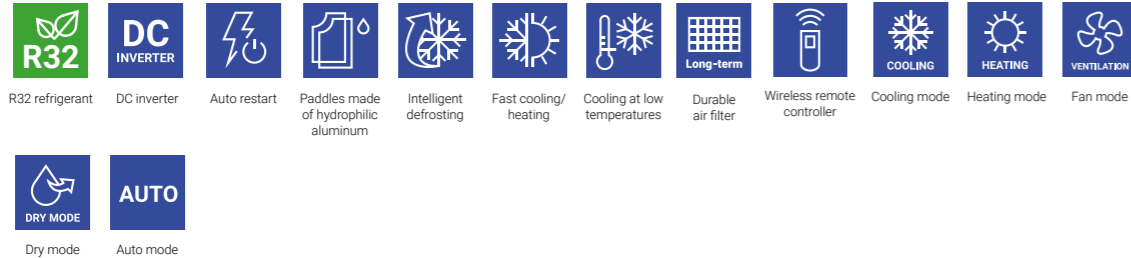

## Multi Split Outdoor Unit

AUX-M2-(14/18)LCLH, AUX-M3-(21/27)LCLH, AUX-M4-36LCLH, AUX-M5-42LCLH



Indoor unit model		AUX-M2-14LCLH	AUX-M2-18LCLH	AUX-M3-21LCLH
Maximum number of indoor units	-	2	2	3
Cooling capacity	[kW]	4,1 (1,8 - 4,51)	5,3 (2,0 - 5,83)	6,2 (2,2 - 6,71)
Heating capacity	[kW]	4,8 (2,05 - 5,28)	5,6 (2,21 - 6,16)	6,6 (2,39 - 7,26)
Power	[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Energy Efficiency Class (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+
SEER / SCOP	[W/W]	6,16 / 4,06	7,07 / 4,08	6,57 / 4,38
Sound pressure level	[dB(A)]	54	55	56
Indoor unit dimensions W/H/D	[mm]	800 x 315 x 545	800 x 315 x 545	834 x 328 x 655
Indoor unit weight	[kg]	34,0	36,0	44,0
Refrigerant type	-	R32	R32	R32
Application area (cooling/heating)	[°C]	-15~-52 / -20~-24	-15~-52 / -20~-24	-15~-52 / -20~-24
Total installation length	[m]	40	40	60
Maximum distance between the indoor and the outdoor units	[m]	25	25	30
Maximum height difference between an indoor and outdoor unit	[m]	15	15	15
Maximum height difference between indoor units	[m]	10	10	10


Indoor unit model		AUX-M3-27LCLH	AUX-M4-36LCLH	AUX-M5-42LCLH
Maximum number of indoor units	-	3	4	5
Cooling capacity	[kW]	7,90 (2,3 - 8,69)	10,50 (2,5 - 11,0)	12,00 (2,77 - 12,7)
Heating capacity	[kW]	8,20 (2,45 - 9,02)	11,00 (2,67 - 11,2)	13,00 (2,96 - 13,1)
Power	[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Energy Efficiency Class (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+
SEER / SCOP	[W/W]	6,30 / 4,04	6,10 / 4,00	6,10 / 4,10
Sound pressure level	[dB(A)]	58	61	61
Indoor unit dimensions W/H/D	[mm]	834 x 328 x 655	985 x 395 x 808	985 x 395 x 808
Indoor unit weight	[kg]	46,0	74,0	75,0
Refrigerant type	-	R32	R32	R32
Application area (cooling/heating)	[°C]	-15~-52 / -20~-24	-15~-52 / -20~-24	-15~-52 / -20~-24
Total installation length	[m]	60	80	80
Maximum distance between the indoor and the outdoor units	[m]	30	35	35
Maximum height difference between an indoor and outdoor unit	[m]	15	15	15
Maximum height difference between indoor units	[m]	10	10	10

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice.




## Multi split system - saving installation space and large flexibility.

The multi split AUX system allows you to connect 2 to 5 indoor units to one unit. This allows for a reduction in the number of necessary outdoor units in comparison with single systems, and thus a significant space saving on building facades, roofs and balconies. In addition, the devices do not have to be installed at the same time. The system can be expanded with new indoor units over time, maintaining the appropriate performance parameters of individual elements of the air conditioning system.

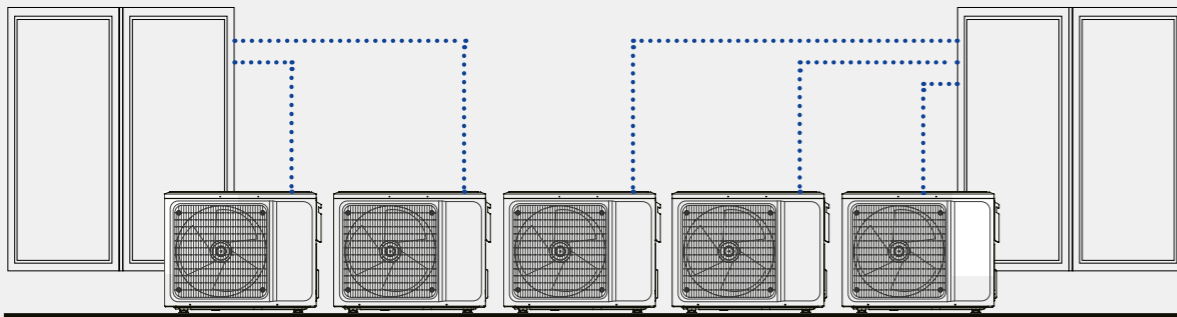


Five indoor units in a single split system.

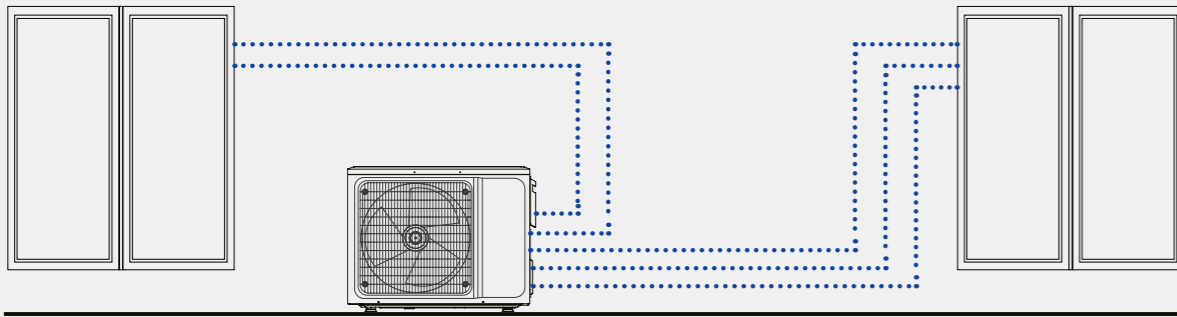

Five indoor units in a multi split system.

## Wide choice of indoor units - always good fit.

The AUX series of multi devices includes as many as 6 types of indoor units - cassette, duct, floor-ceiling and three models of stylish wall-mounted units (Freedom, J-Smart and J-Smart ART series). They are available in various variants of cooling capacity - from 2.05 to 7.03 kW. Such a wide selection allows the units to be well adapted to the size and nature of the room and the needs of users.

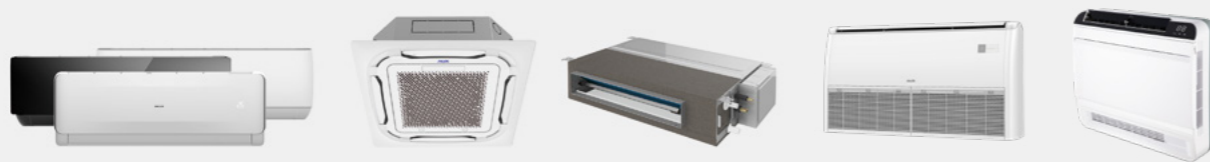

Wall-mounted units (Freedom, J-Smart, J-Smart ART)

Cassette units

Duct units

Floor / Ceiling units

Console

## Commercial air conditioners CAC - efficient solutions air conditioning for utility buildings.

The AUX series of commercial air conditioners, intended for utility facilities such as offices, shops, restaurants and hotels, includes three types of units - duct, cassette and floor-ceiling units. Commercial AUX systems work with R32 refrigerant and a highly efficient inverter compressor, ensuring reliable operation even at very low ambient temperatures down to -20 °C. All units in the CAC series achieve the high energy efficiency class A++ for cooling and A+ for heating.





	Cassette units CAC series	Duct units CAD series	Floor / Ceiling units CAF series	Outdoor units CAC CAO series
<b>Cooling capacity</b> [Btu/h]				
12 kBtu/h	AUX-C-12CAC	-	-	AUX-C-12CAO
18 kBtu/h	AUX-C-18CAC	AUX-C-18CAD	AUX-C-18CAF	AUX-C-18CAO
24 kBtu/h	AUX-C-24CAC	AUX-C-24CAD	AUX-C-24CAF	AUX-C-24CAO
30 kBtu/h	-	AUX-C-30CAD	-	AUX-C-30CAO
36 kBtu/h	AUX-C-36CAC	AUX-C-36CAD	AUX-C-36CAF	AUX-C-36CAO
42 kBtu/h	AUX-C-42CAC	AUX-C-42CAD	AUX-C-42CAF	AUX-C-42CAO
48 kBtu/h	AUX-C-48CAC	AUX-C-48CAD	AUX-C-48CAF	AUX-C-48CAO
60 kBtu/h	AUX-C-60CAC	AUX-C-60CAD	AUX-C-60CAF	AUX-C-60CAO

	Cassette units CAC series	Duct units CAD series	Floor / Ceiling units CAF series
<b>Cooling mode</b>	●	●	●
<b>Heating mode</b>	●	●	●
<b>Fan mode</b>	●	●	●
<b>Dry mode</b>	●	●	●
<b>Auto mode</b>	●	●	●
<b>Auto restart</b>	●	●	●
<b>Intelligent defrosting</b>	●	●	●
<b>Fast cooling/heating</b>	●	●	●
<b>Cooling at low temperatures</b>	●	●	●
<b>Self-cleaning function</b>	●	●	●
<b>Self-diagnosis function</b>	●	●	●
<b>Turbo mode</b>	●	●	●
<b>Sleep mode</b>	●	●	●
<b>Timer</b>	●	●	●
<b>Digital display</b>	●	●	●
<b>Durable air filter</b>	●	●	●
<b>Washable air filter</b>	●	●	●
<b>3D airflow function - vertical and horizontal louver movement</b>	●	●	●
<b>Built-in condensate pump</b>	●	●	●
<b>Wireless remote controller</b>	●	●	●
<b>Wired controller</b>	●	●	●

Specifications, appearance and functions are subject to change without prior notice.

## Cassette units

### CAC Series

Model	AUX-C-12CAC	AUX-C-18CAC	AUX-C-24CAC	AUX-C-36CAC
<b>Cooling /Heating capacity</b>	[kW] 3,60 / 4,20	5,00 / 5,60	7,00 / 8,00	10,55 / 11,15
<b>SEER / SCOP</b>	[W/W] 6,2 / 4,1	6,3 / 4,0	6,5 / 4,2	6,1 / 4,0
<b>Energy Efficiency Class</b> (cooling/heating)	- A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>	<b>AUX-C-12CAC/I</b>	<b>AUX-C-18CAC/I</b>	<b>AUX-C-24CAC/I</b>	<b>AUX-C-36CAC/I</b>
<b>Decorative panel model</b>	- AUX-P-01	AUX-P-01	AUX-P-02	AUX-P-02
<b>Sound pressure level H/M/L</b>	[dB(A)] 45/44/36	45/44/36	47/43/38	51/48/45
<b>Indoor unit dimensions W/H/D</b>	[mm] 570 x 570 x 260	570 x 570 x 260	835 x 835 x 250	835 x 835 x 290
<b>Panel dimensions W/H/D</b>	[mm] 650 x 650 x 55	650 x 650 x 55	950 x 950 x 55	950 x 950 x 55
<b>Panel weight</b> (netto)	[kg] 2,2	2,2	5,3	5,3
<b>Outdoor unit</b>	<b>AUX-C-12CAO</b>	<b>AUX-C-18CAO</b>	<b>AUX-C-24CAO</b>	<b>AUX-C-36CAO</b>
<b>Refrigerant type</b>	- R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)] 54	55	58	57
<b>Outdoor unit dimensions W/H/D</b>	[mm] 800 x 315 x 545	800 x 315 x 545	900 x 350 x 700	970 x 395 x 805
<b>Application area</b> (cooling/heating)	[°C] -15~-52 / -20~-24	-15~-52 / -20~-24	-15~-52 / -20~-24	-15~-52 / -20~-24


Model	AUX-C-42CAC	AUX-C-48CAC	AUX-C-60CAC
<b>Cooling /Heating capacity</b>	[kW] 12,10 / 13,50	14,00 / 16,00	16,00 / 17,00
<b>SEER / SCOP</b>	[W/W] 6,1 / 4,0	6,1 / 4,0	6,1 / 4,0
<b>Energy Efficiency Class</b> (cooling/heating)	- A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>	<b>AUX-C-42CAC/I</b>	<b>AUX-C-48CAC/I</b>	<b>AUX-C-60CAC/I</b>
<b>Decorative panel model</b>	- AUX-P-02	AUX-P-02	AUX-P-02
<b>Sound pressure level H/M/L</b>	[dB(A)] 51/48/45	52/50/48	52/50/48
<b>Indoor unit dimensions W/H/D</b>	[mm] 835 x 835 x 290	835 x 835 x 290	835 x 835 x 290
<b>Panel dimensions W/H/D</b>	[mm] 950 x 950 x 55	950x950 x 55	950x950 x 55
<b>Panel weight</b> (netto)	[kg] 5,3	5,3	5,3
<b>Outdoor unit</b>	<b>AUX-C-42CAO</b>	<b>AUX-C-48CAO</b>	<b>AUX-C-60CAO</b>
<b>Refrigerant type</b>	- R32	R32	R32
<b>Sound pressure level</b>	[dB(A)] 57,0	60,0	60,0
<b>Outdoor unit dimensions W/H/D</b>	[mm] 970 x 395x805	940 x 370 x 1325	940 x 370 x 1325
<b>Application area</b> (cooling/heating)	[°C] -15~-52 / -20~-24	-15~-52 / -20~-24	-15~-52 / -20~-24

\* the price includes the AUX-P01 masking panel

\*\* the price includes the AUX-P02 masking panel


Air conditioning equipment contains fluorinated greenhouse gases R32.

Specifications, appearance and functions are subject to change without prior notice.

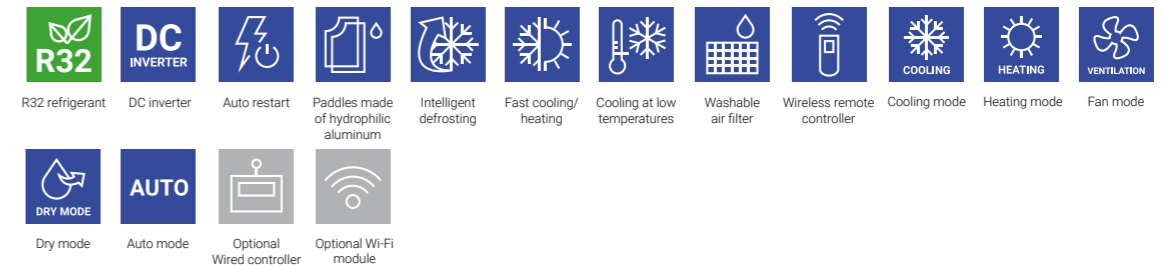

# Duct units


## CAD Series

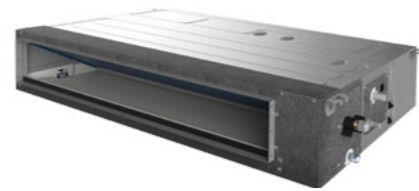

Model		AUX-C-18CAD	AUX-C-24CAD	AUX-C-30CAD	AUX-C-36CAD
<b>Cooling /Heating capacity</b>	[kW]	5,00 / 5,60	7,00 / 8,00	8,40 / 9,00	10,55 / 11,15
<b>SEER / SCOP</b>	[W/W]	6,2 / 4,0	6,1 / 4,0	6,1 / 4,1	6,1 / 4,1
<b>Energy Efficiency Class</b> (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-C-18CAD/I</b>	<b>AUX-C-24CAD/I</b>	<b>AUX-C-30CAD/I</b>	<b>AUX-C-36CAD/I</b>
<b>Sound pressure level H/M/L</b>	[dB(A)]	43/41/40	44/41/39	46/44/41	44/41/39
<b>Indoor unit dimensions W/H/D</b>	[mm]	1000 x 700 x 245	1000 x 700 x 245	1000 x 700 x 245	1400 x 700 x 245
<b>Indoor unit weight</b> (netto)	[kg]	31,0	32,0	32,0	42,0
<b>Outdoor unit</b>		<b>AUX-C-18CAO</b>	<b>AUX-C-24CAO</b>	<b>AUX-C-30CAO</b>	<b>AUX-C-36CAO</b>
<b>Refrigerant type</b>	-	R32	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	55	58	57	57
<b>Outdoor unit dimensions W/H/D</b>	[mm]	800 x 315 x 545	900 x 350 x 700	970 x 395 x 805	970 x 395 x 805
<b>Outdoor unit weight</b> (netto)	[kg]	37	51	65	72
<b>Application area</b> (cooling/heating)	[°C]	-15~52 / -20~24	-15~52 / -20~24	-15~52 / -20~24	-15~52 / -20~24

Model		AUX-C-42CAD	AUX-C-48CAD	AUX-C-60CAD
<b>Cooling /Heating capacity</b>	[kW]	12,10 / 13,50	14,00 / 16,00	16,00 / 17,00
<b>SEER / SCOP</b>	[W/W]	6,1 / 4,1	6,1 / 4,0	6,1 / 4,0
<b>Energy Efficiency Class</b> (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-C-42CAD/I</b>	<b>AUX-C-48CAD/I</b>	<b>AUX-C-60CAD/I</b>
<b>Sound pressure level H/M/L</b>	[dB(A)]	44/41/39	52/49/47	52/49/47
<b>Indoor unit dimensions W/H/D</b>	[mm]	1400 x 700 x 245	1400 x 700 x 245	1400 x 700 x 245
<b>Indoor unit weight</b> (netto)	[kg]	42,0	42,0	42,0
<b>Outdoor unit</b>		<b>AUX-C-42CAO</b>	<b>AUX-C-48CAO</b>	<b>AUX-C-60CAO</b>
<b>Refrigerant type</b>	-	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	57,0	60,0	60,0
<b>Outdoor unit dimensions W/H/D</b>	[mm]	970 x 395 x 805	940 x 370 x 1325	940 x 370 x 1325
<b>Outdoor unit weight</b> (netto)	[kg]	72,0	92,0	92,0
<b>Application area</b> (cooling/heating)	[°C]	-15~52 / -20~24	-15~52 / -20~24	-15~52 / -20~24

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice

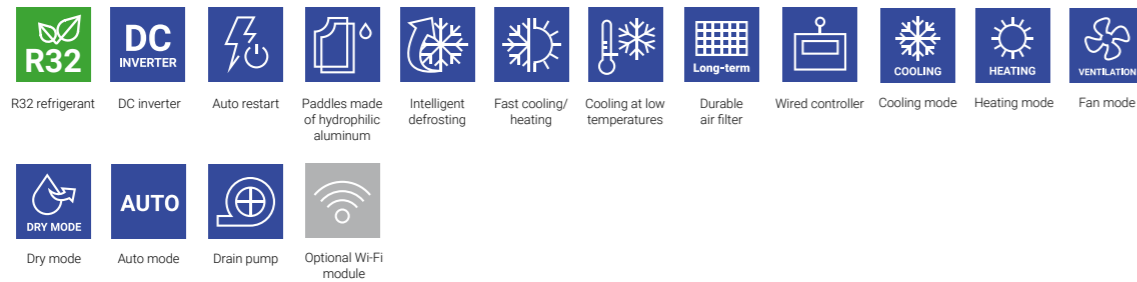

# Floor / Ceiling units


## CAF Series



Model		AUX-C-18CAF	AUX-C-24CAF	AUX-C-36CAF
<b>Cooling /Heating capacity</b>	[kW]	5,00 / 5,60	7,00 / 8,00	10,55 / 11,15
<b>SEER / SCOP</b>	[W/W]	6,1 / 4,1	6,3 / 4,1	6,1 / 4,0
<b>Energy Efficiency Class</b> (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-C-18CAF/I</b>	<b>AUX-C-24CAF/I</b>	<b>AUX-C-36CAF/I</b>
<b>Sound pressure level H/M/L</b>	[dB(A)]	45/40/34	47/43/38	53/50/47
<b>Indoor unit dimensions W/H/D</b>	[mm]	929 x 660 x 205	1280 x 660 x 205	1631 x 660 x 205
<b>Indoor unit weight</b> (netto)	[kg]	25,0	32,0	44,0
<b>Outdoor unit</b>		<b>AUX-C-18CAO</b>	<b>AUX-C-24CAO</b>	<b>AUX-C-36CAO</b>
<b>Refrigerant type</b>	-	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	55	58	57
<b>Outdoor unit dimensions W/H/D</b>	[mm]	800 x 315 x 545	900 x 350 x 700	970 x 395 x 805
<b>Outdoor unit weight</b> (netto)	[kg]	37,0	51,0	72,0
<b>Application area</b> (cooling/heating)	[°C]	-15~52 / -20~24	-15~52 / -20~24	-15~52 / -20~24

Model		AUX-C-42CAF	AUX-C-48CAF	AUX-C-60CAF
<b>Cooling /Heating capacity</b>	[kW]	12,10 / 13,50	14,00 / 16,00	16,00 / 17,00
<b>SEER / SCOP</b>	[W/W]	6,1 / 4,0	6,1 / 4,0	6,1 / 4,0
<b>Energy Efficiency Class</b> (cooling/heating)	-	A++ / A+	A++ / A+	A++ / A+
<b>Indoor unit</b>		<b>AUX-C-42CAF/I</b>	<b>AUX-C-48CAF/I</b>	<b>AUX-C-60CAF/I</b>
<b>Sound pressure level H/M/L</b>	[dB(A)]	53/50/47	53/51/49	53/51/49
<b>Indoor unit dimensions W/H/D</b>	[mm]	1631 x 660 x 205	1631 x 660 x 205	1631 x 660 x 205
<b>Indoor unit weight</b> (netto)	[kg]	44,0	44,0	44,0
<b>Outdoor unit</b>		<b>AUX-C-42CAO</b>	<b>AUX-C-48CAO</b>	<b>AUX-C-60CAO</b>
<b>Refrigerant type</b>	-	R32	R32	R32
<b>Sound pressure level</b>	[dB(A)]	57	60	60
<b>Outdoor unit dimensions W/H/D</b>	[mm]	970 x 395 x 805	940 x 370 x 1325	940 x 370 x 1325
<b>Outdoor unit weight</b> (netto)	[kg]	72,0	92,0	92,0
<b>Application area</b> (cooling/heating)	[°C]	-15~52 / -20~24	-15~52 / -20~24	-15~52 / -20~24

Air conditioning equipment contains fluorinated greenhouse gases R32. Specifications, appearance and functions are subject to change without prior notice

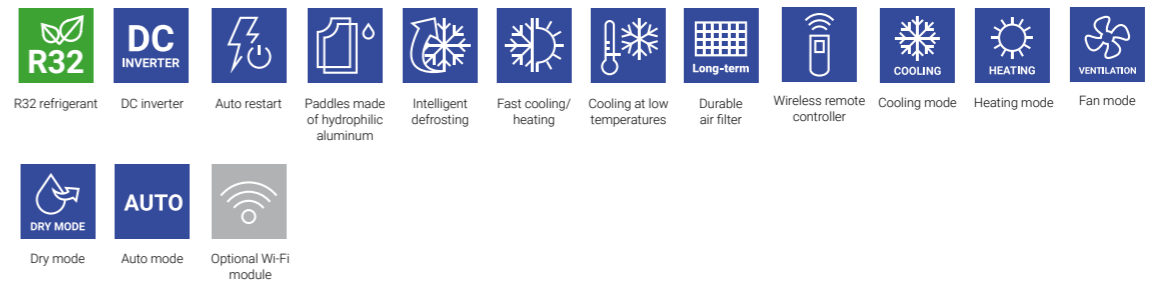





## Control systems - wired controllers and wireless.



● - standard ○ - optional

		Wireless controller <b>K type</b>	Wireless controller <b>L type</b>	Wireless controller <b>T type</b>	Wireless controller <b>H type</b>	Wired controller <b>XK-05</b>	Wired controller <b>XK-04</b>
<b>Residential air conditioners</b>	<b>Freedom</b>	●					
	<b>J-Smart</b>			●			
	<b>J-Smart ART</b>			●			
	<b>Halo</b>			●			
	<b>Halo Deluxe</b>			●			
	<b>Q-Smart</b>		●				
	<b>Q-Smart Premium</b>			●			
	<b>Q-Smart Premium Grey</b>			●			
	<b>Portable air conditioner MI</b>					●	
<b>Commercial air conditioners</b>	<b>Cassette units</b>		●			○	
	<b>Duct units</b>	○	○			●	
	<b>Floor / Ceiling units</b>		●			○	
<b>Multi split systems</b>	<b>Wall-mounted units Freedom</b>	●					
	<b>Wall-mounted units J-Smart</b>			●			
	<b>Wall-mounted units J-Smart ART</b>			●			
	<b>Cassette units</b>		●				○
	<b>Duct units</b>	○	○			●	
	<b>Floor / Ceiling units</b>		●			○	
		<b>Console</b>					

Note: the figures show the general appearance of the wireless / controllers they may slightly differ from the material object (depends on the model)



AUXkondicionavimas

A new dimension  
of quality

---

**AUX**  
AIR CONDITIONER

 **AUXkondicionavimas**

[www.auxcool.com](http://www.auxcool.com)

Official distributor of AUX air conditioners:

**MEDGANA UAB**

Commercial offices in Lithuania:

**Vilnius:**

📍 Savanorių 123, 03150 Vilnius

**Kaunas:**

📍 Raudondvario 99A, 47184 Kaunas

[www.medgana.lt](http://www.medgana.lt)